



*Enjoy
watersaving.*



Novolux[®] water-saving hand shower

with **iso**flow[®]

- **G 1/2 connection - fits any usual shower hose**
- **Low-aerosol water flow**
- **Fast pay-off**
- **Reduced limescale**

The Novolux[®] showerhead has conventional water jet characteristics. The nozzles of this shower head are specially designed to create a full water jet whilst reducing the water consumption at the same time.

Its robust construction, the choice of top-quality materials and best possible limescale protection make the Novolux shower head the ideal solution for the sophisticated professional sector. The flow rate is limited by the integrated flow rate controller which functions independently of the water pressure and reduces the flow rate to 10 litres per minute.

The Novolux[®] hand shower is also available with an integrated rotary connection made from chrome-plated brass. The free-moving rotary connection prevents the nuisance of the shower hose becoming twisted and wearing out prematurely.


Spray pattern:





Novolux[®] water-saving hand shower

Dimensions:

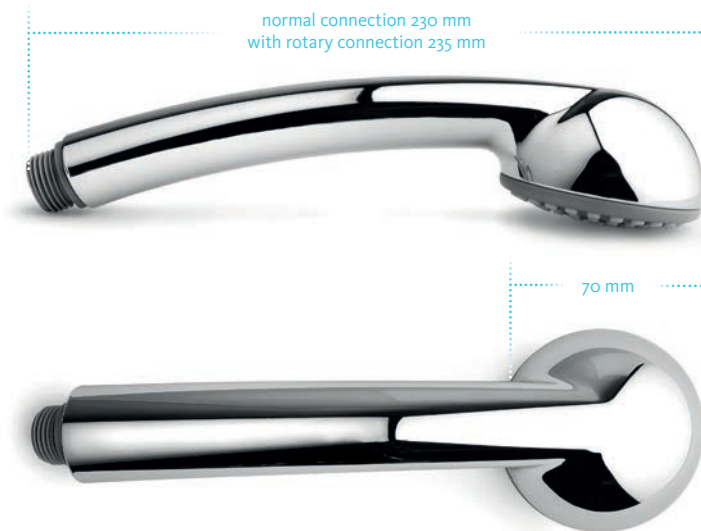

Product assortment:



G1/2 rotary connection

G1/2 normal connection

Models:

model	item	flow volume
2710	Novolux, white	10 l/min
2712	Novolux, white	10 l/min with rotary connection
2715	Novolux, chrome-plated	10 l/min
2717	Novolux, chrome-plated	10 l/min with rotary connection
2720	Novolux, white	8 l/min
2722	Novolux, white	8 l/min with rotary connection
2725	Novolux, chrome-plated	8 l/min
2727	Novolux, chrome-plated	8 l/min with rotary connection

What is *isoflow*?

isoflow has an unique, patented design. The O-ring is not exposed to the water but is protected by the two adjusting elements, which provide for the variable opening. Thus it combines precise flow rate control with low noise and long service life.

Technical specifications:

scope of delivery	1x gasket 19 x 13 x 2 mm EPDM 1x gasket 18,5 x 12 x 1,5 mm fiber composite
tests & standards	complies with the requirements of TrinkwV
guarantee	2 years